


SMA Adapter Panel

ZT-314D

50Ω DC to 18 GHz

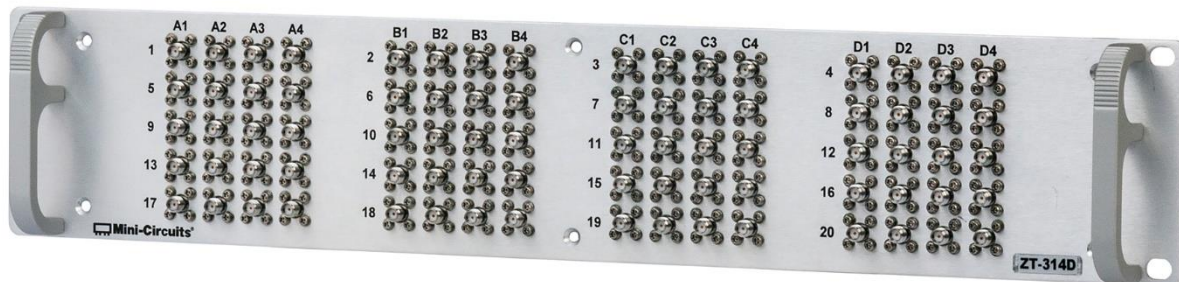

Product Overview

Mini-Circuits panel-mounted structures provide clean, organized management of cable runs and connections in complex, high-volume test setups. Multiple connector adapters, power splitters, directional couplers and other essential RF components and test accessories can be integrated efficiently within the test system. Custom configurations are available upon request.

Key Features

Parameter	Details
Configuration	80 x connector adapters: SMA female to SMA female
Dimensions	19" width, 2U height

Electrical Specifications at 25°C, per Adapter

Parameter	Conditions	Min	Typ	Max	Units
Frequency		DC		18	GHz
Insertion Loss	DC to 18 GHz		0.1		dB
VSWR	DC to 18 GHz			1.15	:1

Typical Performance Data

